

## LUMINAIRES FOR CENTRAL BATTERY SYSTEM WITH LEDs (CBS)



### TECHNICAL CHARACTERISTICS (FOR LED SPECs (see page 3))

	GR-1324/15L	GR-1324/30L
TYPE	For Central Battery System (CBS)	
OPERATION VOLTAGE	85-250VDC/100-250VAC 50-60Hz	
MAXIMUM POWER CONSUMPTION	1.5W/1.9VA	2.8W/3.1VA
ILLUMINATION SOURCE	15 white LED	30 white LED
ILLUMINATION	125 lm	250 lm
DEGREES OF COVER PROTECTION	IP 40	
PRODUCED IN ACCORDANCE WITH	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3	
OPERATION TEMPERATURE RANGE	-20 to 55 °C	
RELATIVE HUMIDITY	Up to 95%	
VIEWING DISTANCE	22m	
CONSTRUCTION MATERIALS	ABS/PC, PC	
EXTERNAL DIMENSIONS	353 x 143 x 60 mm	
TYPICAL WEIGHT	580gr.	
GUARANTEE	3 years (1 year for the battery)	

**Thank you for your trust in our products**  
**Olympia Electronics - European manufacturer**

#### GENERAL

These luminaires are for indoor use only (ta 55°C) where emergency luminaires (CBS) are needed. Each luminaire must be permanently connected to mains power supply.

#### ATTENTION!!!


1. Operations for installation, maintenance or

testing must be done by authorized personnel only.

#### INSTALLATION

To install the luminaire follow the installation instructions below.

### INSTALLATION INSTRUCTIONS

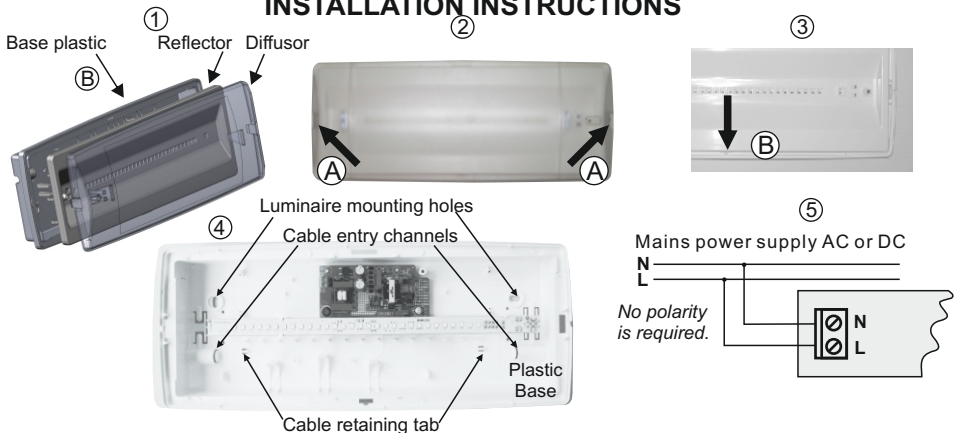

- To install the luminaire you must dismantle it into 3 parts .
- Place a flat blade screwdriver in the area **A** to release the diffusor's plastic hook.
- Place a flat blade screwdriver in the area **B** to release the reflector's plastic hook.
- Use the included mounting parts to mount the base plastic. Pass the mains cable through a cable entry channel and fasten it to the respective cable retaining tab, with the included tie.
- Connect the mains cables to the terminal blocks (no polarity is required in DC operation).
- Refit the removed parts in steps 2 and 3 (mind the correct orientation) and the luminaire is ready to operate.

### **MARKING PANEL SP-116**

A marking panel SP-116 can be installed on the luminaire in 3 different locations. This marking panel is installed perpendicular to the diffuser of the luminaire, as shown in the pictures below. The panel is pre-printed and has a plastic accessory on each side that is used to fasten the panel to the luminaire. The following panels are available on request.






### **Placing the SP-116 marking panel**

Place the plastic mounting accessories of the marking panel on each side as shown in the pictures.



## **Installation methods**

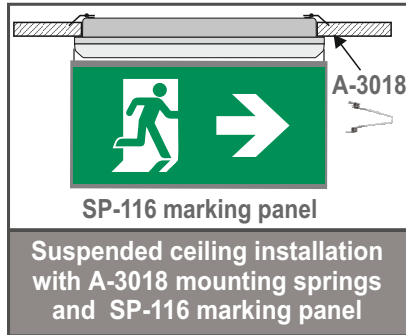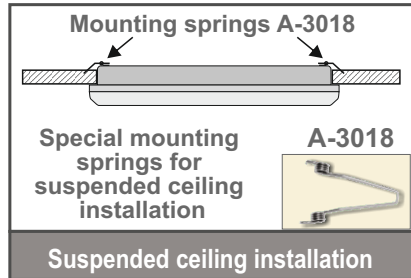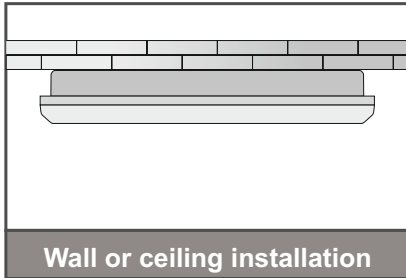

*The light source contained in this luminaire shall only be replaced by the manufacturer, or his agent, or a similar qualified person.*

*NOTE! The light source is non-user replaceable.*

**NOTE:** LED= Light Emitting Diode  
**LABELING EXPLANATION:**

**Z:** Central Supply **1:** Maintained  
**G:** Internally illuminated

Note!! The installer should fill in, on the specification label, the letter G if the luminaire is used as a safety sign.

**Z 1 G** ←

### Mounting methods





The luminaire can be surface mounted on walls or ceilings or in suspended ceilings. For suspended ceilings installations, the A-3018 special accessories are required which can be found in the catalog and must be ordered separately.

### Suspended ceiling installation.

On the bottom of the base plastic of the luminaire there are two H shaped cut outs. These are used to install the A-3018 mounting springs. *Note! The luminaire is not suitable for mounting on tubular materials or surfaces.*

1. With a sharp tool remove the appropriate plastic pieces to fit the mounting springs. First place the edges of the mounting spring to the respective holes and install the one end of the coil to the support axis.
2. Install the other end of the coil to the other support axis.
3. Bend the springs and place the luminaire to the respective suspended ceiling's hole.

*The luminaire's placement to the suspended ceiling must be done after the connection with power supply cables.*

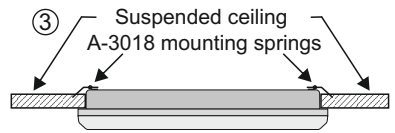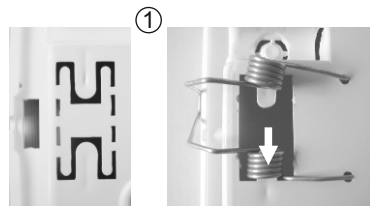

LED MODULE CHARACTERISTICS		
	GR-1324/15L	GR-1324/30L
Manufacturer	olympia electronics S.A	
Model Number	0404153/15L	0404153/30L
Voltage Range	8.5 - 10.5VDC	
Nominal Power	980mW	2W
Connections	Non reversible connection between main pcb and led module	
Temperature (tc)	50 °C max. across the board	

### WARRANTY

Olympia Electronics guarantees the quality, condition and operation of the goods. The period of warranty is specified in the official catalogue of Olympia Electronics and also in the technical leaflet, which accompanies each product. This warranty ceases to exist if the buyer does not follow the technical instructions included in official documents given by Olympia Electronics or if the buyer modifies the goods provided or has any repairs or re-setting done by a third party, unless Olympia Electronics has fully agreed to them in writing. Products that have been damaged can be returned to the premises of our company for repair or replacement, as long as the warranty period is valid. Olympia Electronics reserves the right to repair or to replace the returned goods and to or not charge the buyer depending on the reason of deflection. Olympia Electronics reserves the right to charge or not the buyer the transportation cost.

### HEAD OFFICE

72nd km. O.N.R. Thessaloniki-Katerini  
 P.C. 60300 P.O. Box 06 Eginio Pierias Greece  
[www.olympia-electronics.gr](http://www.olympia-electronics.gr)  
[info@olympia-electronics.gr](mailto:info@olympia-electronics.gr)