



RT-22/HACCP
RT-24/HACCP

Electric insecticides with glue trap



Thank you for your trust in our products
Olympia Electronics - European manufacturer


The above products are produced and comply with 93/43 of the European council on the 14th of June 1993.(HACCP)

GENERAL

The electric insecticides are used to exterminate various annoying insects. The built-in lamps (Black Light) produce a light that attracts insects from a distance. They can be used in every area that many insects exist. These models use lamps with special plastic shell to protect the area from broken glass parts in case of a broken lamp. The models RT-22/HACCP and RT-24/HACCP do not use high voltage but a special glue trap to exterminate the insects. These insecticides protect us from all insects that are attracted by the special light (mosquitos, flies, gnats) without using chemicals. The glue trap can easily be changed via the special removal compartment found under the insecticide.


The **RT-24/HACCP** has four fluorescent tubes, two on each side and is a double sided insecticide suitable for hanging on the ceiling.

The **RT-22/HACCP** has two fluorescent lamps only on one side, it is a single sided insecticide and is suitable for wall mounting.

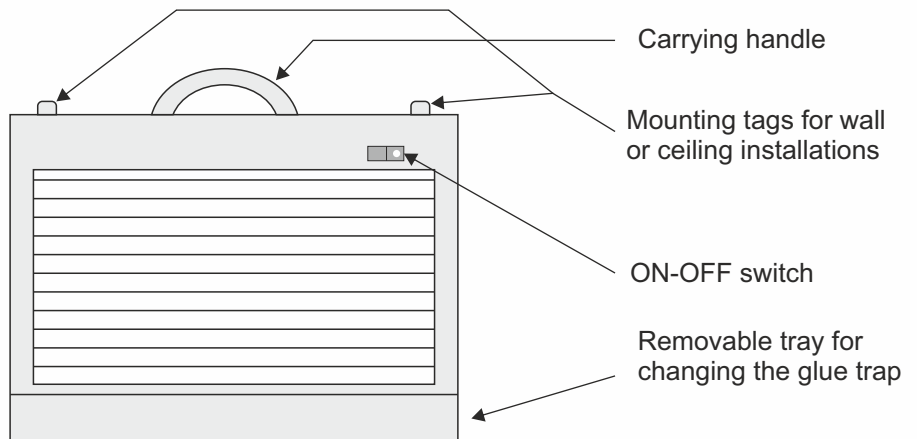


Mounting - connecting


The packaging contains all the necessary accessories for mounting the device on a wall or a ceiling. The schematics below show us the two mounting methods. The insecticides can also be hung on the ceiling with chains. In order for the insecticide to operate simply insert the power plug into any suitable wall outlet that is readily accessible and set the switch to the ON position.

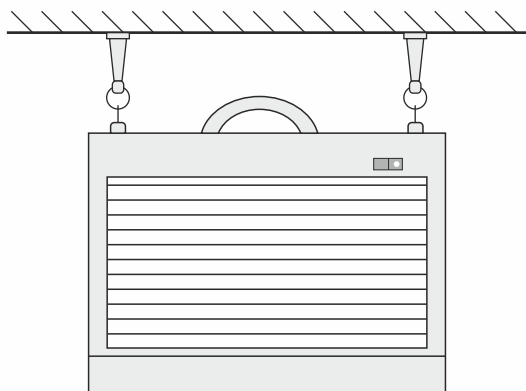

Ceiling mounting using the special brackets and rings

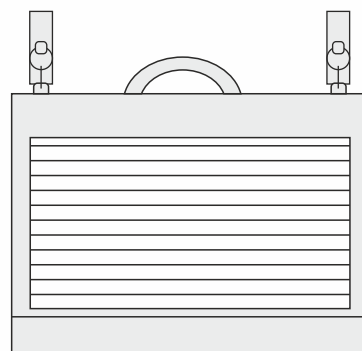

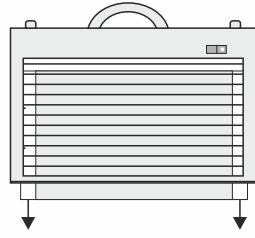

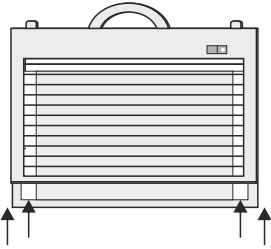
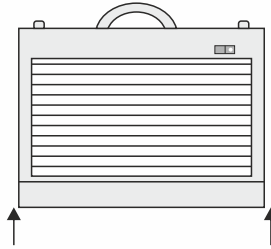


Wall mounting using the special brackets and rings. This position is suitable for the **RT-22/HACCP** insecticides

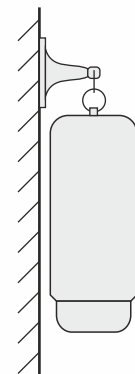

Inserting- changing the glue trap

Inside the packaging there is a glue trap that must be inserted by the user in the insecticide. This operation must be done with the power plug removed from the wall outlet. The procedure is very simple and is described below:

<p>1</p>  <p>The glue trap as found inside the packaging</p>	<p>2</p>  <p>By pressing on the positions shown by the arrows and pulling downwards we can remove the special tray from the bottom of the device.</p>	<p>3</p>  <p>In order to change the glue trap simple remove the old glue trap by pulling it downwards.</p>
<p>4</p>  <p>Remove the special protective cover of the glue trap. If the model is the RT-22/HACCP then remove the protective cover on only on side of the glue trap. This side will be placed towards the lamps. If the models is the RT-24/HACCP then remove the protective covers on both sides of the trap.</p>	<p>5</p>  <p>Insert the glue trap into the trap retaining sockets that are found between the lamps.</p>	<p>6</p>  <p>Install the tray that was previously removed in order to close the bottom of the insecticide.</p>

Changing the lamps or the Starter

If the lamp or the Starter must be changed, this procedure can be done by the user, by following the procedure below:

1. Remove the power plug from the wall outlet.
2. Remove the required external grid by unfastening the retaining screws.
3. Replace the Starter or the lamp which is not operating with one of the same type.
4. Reinstall the external grid using the retaining screws.
5. Insert the power plug into the wall outlet.

The lamp type used are: **SYLVANIA** type **F15W/350 BL-T8**.

TECHNICAL CHARACTERISTICS

	RT-22/HACCP	RT-24/HACCP
Operation voltages	220-240V AC 50-60Hz	
Maximum consumption	48W	95W
Operation temperature range	0 to 60 °C	
Humidity	Up-to 95% relative humidity	
Construction material	ABS-PC	
Dimensions	480 x 140 x 400 mm	
Weight	3720 gr	4450 gr
Degrees of cover protection	IP 20	
Produced in accordance with	EN 60335-1, EN 60335-2-59	
Guarantee	2 years (1 year for the lamp)	

WARNING!!!

- The device is suitable for indoor use.
- The device must be kept away from children.
- The device must be not installed in areas with combustible gases or explosive dust.
- When the mains cable is damaged, this must be replaced by our SERVICE department or by an authorized technician.

WARRANTY

Olympia Electronics guarantees the quality, condition and operation of the goods. The period of warranty is specified in the official catalogue of Olympia Electronics and also in the technical leaflet, which accompanies each product. This warranty ceases to exist if the buyer does not follow the technical instructions included in official documents given by Olympia Electronics or if the buyer modifies the goods provided or has any repairs or re-setting done by a third party, unless Olympia Electronics has fully agreed to them in writing. Products that have been damaged can be returned to the premises of our company for repair or replacement, as long as the warranty period is valid.

Olympia Electronics reserves the right to repair or to replace the returned goods and to or not charge the buyer depending on the reason of deflection. Olympia Electronics reserves the right to charge or not the buyer the transportation cost.

HEAD OFFICE

72nd km. O.N.R. Thessaloniki-Katerini
P.C. 60300 P.O. Box 06 Eginio Pierias Greece
www.olympia-electronics.gr
info@olympia-electronics.gr