




## GR-8/LEDs & GR-9/LEDs EMERGENCY LIGHTING SLIM LIGHT

Reliability and elegance are the main features of these luminaires, which with their modern minimal and discreet style, make them ideal for any architectural project. High quality guarantees unparalleled reliability.

- Maintained / non maintained operation
- 1,5h & 3h autonomous duration



[www.olympia-electronics.com](http://www.olympia-electronics.com)



*for a safer world!*

# **GR-8/LEDs & GR-9/LEDs** **EMERGENCY LIGHTING** **SLIM LIGHT**

Modern and discreet luminaires suitable for domestic or professional use. Low consumption combined with low cost makes them the best choice to meet the basic needs of small facilities, such as restaurants, shops, office buildings, etc.

The luminaires can be easily converted into single-sided marking sign luminaires with a viewing distance of 15 meters, by placing the stickers included in the package.

When installed on the ceiling or recessed mounted on a suspended ceiling with the base A-3008 and with the hanging marking panel, they are converted into both single and double sided marking sign luminaires with a viewing distance of 20 meters.

Lamp  
LED

Construction materials  
ABS/PC, Polycarbonate


Installation  
Mounting on wall or ceiling  
Hanging mounting

Autonomy options  
1,5 or 3 hours duration autonomy

Automatic capacity test  
All self-testing luminaires are equipped with a control system that automatically performs monitoring procedures according to EN 62034.


Placements  
Small buildings such as shops, offices, restaurants, homes and so on.

Dimensions in cm

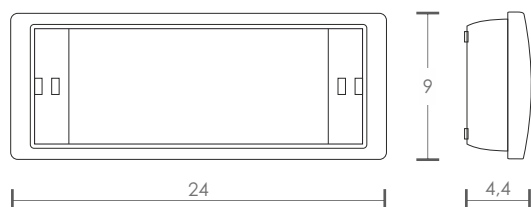

Installation methods

Wall mounting

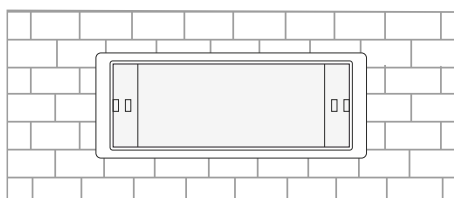

Recessed mounting on a suspended ceiling  
with the A-3008 base and  
the SP-1008 hanging marking panel




Recessed mounting  
on a suspended ceiling  
with the A-3008 base



Power supply



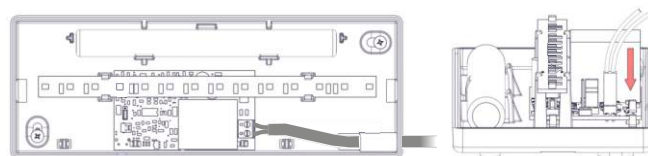

230V AC  
Easy way to connect





| Description                                       | Code      | Battery (Ni-Cd) | Consumption | Light source power (mains/emergency) | Autonomous Duration |
|---------------------------------------------------|-----------|-----------------|-------------|--------------------------------------|---------------------|
| GR-8/LEDs<br>Maintained /<br>non maintained, IP42 | 923378005 | 3,6V/0.6Ah      | 2,7W / 3VA  | 40lm / 100lm                         | 1,5h                |
| GR-9/LEDs<br>Maintained /<br>non maintained, IP42 | 923009007 | 3,6V/1Ah        | 3W / 3,5VA  | 38lm / 100lm                         | 3h                  |

#### Single sided pictogram

| Code      | Description                                                 |                                                                                       | Included | On demand |
|-----------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|----------|-----------|
| 807008106 | S-00802/LO Pictogram/left indication /15m viewing distance  |  | ✓        |           |
| 807008104 | S-00802/RO Pictogram/right indication /15m viewing distance |  | ✓        |           |
| 807008108 | S-00802/DO Pictogram/down indication /15m viewing distance  |  | ✓        |           |
| 807008110 | S-00802/UO Pictogram/up indication /15m viewing distance    |  |          | ✓         |

#### Accessories


| Code      | Description                                                                                    | Included | On demand |
|-----------|------------------------------------------------------------------------------------------------|----------|-----------|
| 927300800 | A-3008 Base for recessed mounting on a suspended ceiling(mounting springs included)            |          | ✓         |
| 922100800 | SP-1008/RLDUB Double sided hanging marking panel with all indications and 20m viewing distance |          | ✓         |

#### Batteries

| Code      | Description                        |
|-----------|------------------------------------|
| 601223610 | A-931/HT 3,6V/1000mAh NiCd Battery |
| 601003606 | A-926 3,6V/600mAh Ni-Cd Battery    |



A-3008

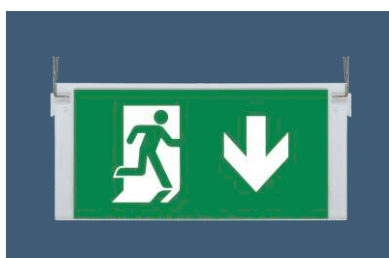

SP-1008/RLDUB



SLIM LIGHT  
WITS



[www.olympia-electronics.com](http://www.olympia-electronics.com)

European  
manufacturer



The company is certified by

APPROVAL  
**SWISS**  
Objectively True  
ISO 14001, ISO 45001, ISO 9001

F-001-010