

## GENERAL PURPOSE TELEPHONE SIREN WITH ADJUSTABLE VOLUME



TECHNICAL CHARACTERISTICS	BS-500
OPERATION VOLTAGE	220-240V AC/50-60Hz
MAXIMUM POWER CONSUMPTION	6W ( at 105 dB)
SOUND OUTPUT (1m)	40 - 105 dB ( adjustable )
DEGREES OF COVER PROTECTION	IP20
PRODUCED IN ACCORDANCE WITH	EN 50082-1, EN 61000-3-2, EN 61000 -3-3
OPERATION TEMPERATURE RANGE	-10 to 60 °C
RELATIVE HUMIDITY	Up to 95%
CONSTRUCTION MATERIALS	ABS
DIMENSIONS	92mm (diam.) x 107mm (height)
TYPICAL WEIGHT	350gr.
GUARANTEE	2 years

**Congratulations for your selection to buy this product.  
Olympia Electronics - European manufacturers.**

### GENERAL

Telephone electronic sounder is connected to the telephone line in parallel and gives us a strong sound signal when there is a call.

It is used everywhere there is a noisy environment and a telephone call is impossible to be heard (e.g. factories, laboratories etc). Installation and connection of BS-500 is described below.

### INSTALLATION

To support it there is a special plastic base included in the BS-500(see Fig.1).

The plastic base mounts on the wall with the screws which are in the package. Then unscrewing the screws A and B (Fig.1) install the special base on the edge of the device and screw the same screws.

In order to connect it, (see Fig.2), simply first connect the cable with the indication "Telephone line" to the telephone line in parallel, and then connect the cable with the indication "230V AC" to the mains power supply

There is also a potentiometer which allow us to adjust the volume.




Figure 1

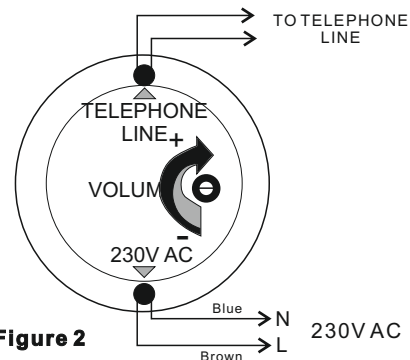


Figure 2

### WARRANTY

Olympia Electronics guarantees the quality, condition and operation of the goods. The period of warranty is specified in the official catalogue of Olympia Electronics and also in the technical leaflet, which accompanies each product. This warranty ceases to exist if the buyer does not follow the technical instructions included in official documents given by Olympia Electronics or if the buyer modifies the goods provided or has any repairs or re-setting done by a third party, unless Olympia Electronics has fully agreed to them in writing. Products that have been damaged can be returned to the premises of our company for repair or replacement, as long as the warranty period is valid. Olympia Electronics reserves the right to repair or to replace the returned goods and to or not charge the buyer depending on the reason of defection. Olympia Electronics reserves the right to charge or not the buyer the transportation cost.

### HEAD OFFICE

72nd km. O.N.R. Thessaloniki-Katerini  
P.C. 60300 P.O. Box 06 Eginio Pierias Greece

[www.olympia-electronics.gr](http://www.olympia-electronics.gr)

[info@olympia-electronics.gr](mailto:info@olympia-electronics.gr)