

RT-12

Electric insecticide



Thank you for your trust in our products.
Olympia Electronics - European manufacturer.


Description

The device was created to exterminate all disturbing insects. The special fluorescent tubes (Black light) attracts insects from long distances. For this reason it could be used in every place that many insects exist. RT-12 exterminates the insects by high voltage. Without using any chemical material it offers a complete protection against many insects like mosquitos, flies, tiny gents e.t.c. There is a special drawer at the bottom of the device where all dead insects are collected. The special draw is removed easily in order to empty the drawer.


Installation - Connection

The package includes all the required materials for mounting on the wall or on the ceiling. The two figures show us two mounting ways. Also we can hang them with a chain.

Just plug the apparatus to the mains, turn the switch to the ON position and it is ready to operate. The mains power supply plug should be readily accesible.

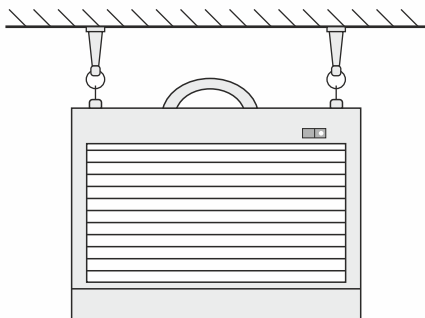

Ceiling mounted using the special mounting accessories

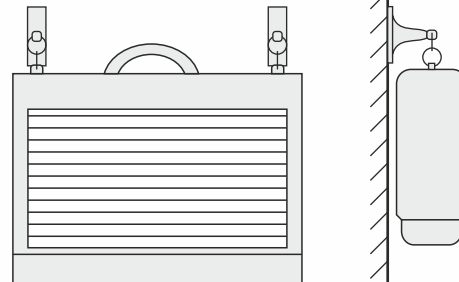

Wall mounted using the special mounting accessories.

Lamp or starter replacement

In case which required replacement lamp or starter we must follow the below process:

1. **Remove the plug from the mains power supply**
2. Remove the suitable external grid, unfastening the screws.
3. Replace the lamp or the starter which is not operating.
4. Place the external grid on its position and fasten the screw.
5. Place again the plug in the mains power supply.

The lamps which are used are : **F15W/350 BL-T8** from **SYLVANIA**.

TECHNICAL SPECIFICATIONS

	RT-12
Mains Voltage	220-240V AC/50-60Hz
Max. Consumption	100VA
Operation temperature range	0 to 60 °C
Humidity	Up to 95% relative humidity
Construcion material	Bayblend FR3010, transparent P.C
Dimensions	480 x 140 x 400 mm
Weight	5200 gr
Degrees of cover protection	IP 20
Produced in accordance with	EN 60335-1, EN 60335-2-59
Guarantee	2 years (1 year for the lamp)

Warning!!!

- The device is suitable for internal installation.
- The device must be kept away from children.
- The device should not be used in areas with combustible gases or explosive dust.
- The device is not suitable for barn, stable and alike places.
- If the devices cable is worn or damaged it must be replaced from OLYMPIA ELECTRONICS SERVICE department.

WARRANTY

Olympia Electronics guarantees the quality, condition and operation of the goods. The period of warranty is specified in the official catalogue of Olympia Electronics and also in the technical leaflet, which accompanies each product. This warranty ceases to exist if the buyer does not follow the technical instructions included in official documents given by Olympia Electronics or if the buyer modifies the goods provided or has any repairs or re-setting done by a third party, unless Olympia Electronics has fully agreed to them in writing. Products that have been damaged can be returned to the premises of our company for repair or replacement, as long as the warranty period is valid.

Olympia Electronics reserves the right to repair or to replace the returned goods and to or not charge the buyer depending on the reason of defection. Olympia Electronics reserves the right to charge or not the buyer the transportation cost.

HEAD OFFICE

72nd km. O.N.R. Thessaloniki-Katerini
P.C. 60300 P.O. Box 06 Eginio Pierias Greece
www.olympia-electronics.gr
info@olympia-electronics.gr